



MI 00 609


Il Materiale MI 00 609 è un materiale privo di amianto. Con un basso coefficiente di attrito ma una grande tenuta alla resistenza meccanica. È composto principalmente da resine fenoliche legate da agenti modificanti a fibre minerali che permettono di stabilizzare il coefficiente di attrito

MI 00 609 is a non-asbestos and moulded friction material. With a low friction coefficient and good resistance against wear. It is composed basically of resins as a link system with frictional modifier agents and mineral fibres to enhance its strength which helps to establish the friction coefficient value.

Dati Tecnici / Technical Data


Friction properties (according graphics)

Static Friction Coefficient (15bar, from box):	0.39±0.05	μ
Static Friction Coefficient (15bar, 100°C):	0.35±0.05	μ
Dynamic Friction Coefficient:	see charts	
Wear Rate:	see charts	
T° Fading:	>250	°C

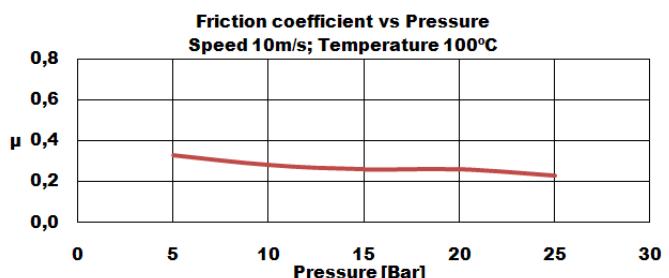


Physical properties

Hardness (DIN53505):	70 - 75	Shore-D
Specific Gravity (ASTM D792):	1,65±0,05	gr/cm3
Ignition Loss (ASTM D7348):	34 - 38	%
Acetone Extraction (ASTM D494):	2±0,2	%

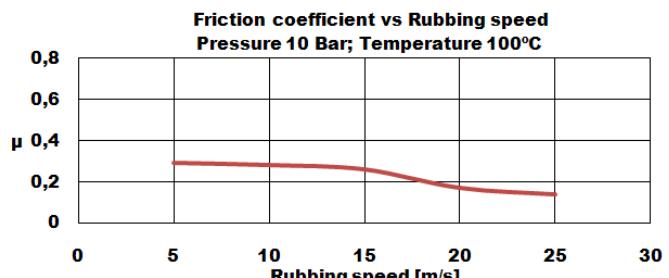

Mechanical properties

Tensile Strength (ASTM D638):	16±5	N/mm ²
Compressive Strength (ISO 844:2014):	100±5	N/mm ²
Young Modulus (ASTM D638):	3800±100	N/mm ²

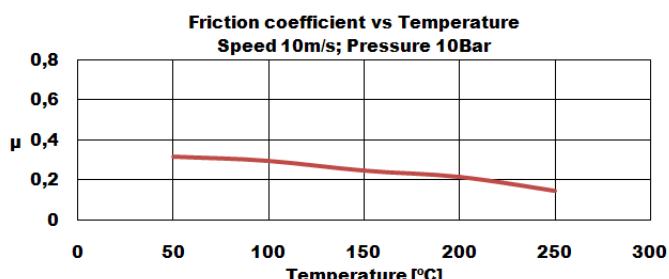


Recommended Working Values

T° Max. Continuous Operation:	200	°C
T° Max. Intermittent Operation:	250	°C

Others

Recommended Mating Surface:	Perlitic cast iron, hardness HB150-200
Recommended Adhesives:	Thermosetting adhesive

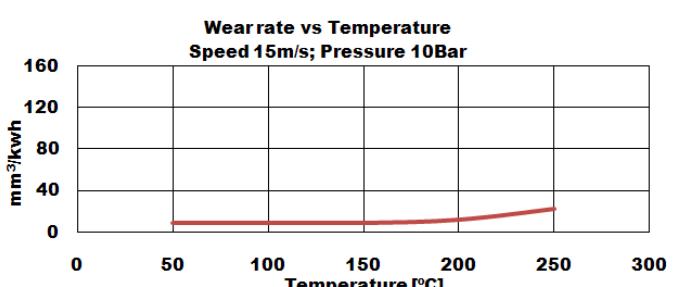

Rubbing speed, temperature and pressure are related. Changing any values will change other. The values shown represent typical conditions, but are not ultimate limits of the material.